

U.S. DEPARTMENT OF COM.
Patent and Trademark

DOCUMENT RETRIEVAL REQUEST FORM

Requester's Name: <u>Edward Jorgensen</u>	Case Serial Number:	Art Unit/Org.: <u>2675</u>
Phone: <u>703 305 2650</u>	Fax: <u>703 746-7425</u>	Building: <u>CPK 2</u>
		Room Number: <u>6V03</u>

Class/Sub-Class:	
Date of Request: <u>21 November 2003</u>	Date Needed By: <u>25 November 2003</u>
Paste or add text of citation or bibliography: <input checked="" type="checkbox"/> Paste Citation <input type="checkbox"/> Only one request per form. Original copy only.	

Author/Editor:	
Journal/Book Title:	
Article Title:	
Volume Number:	Report Number: Pages:
Issue Number:	Series Number: Year of Publication:
Publisher:	
Remarks: <div style="border: 1px solid black; border-radius: 50%; width: 50px; height: 50px; display: flex; align-items: center; justify-content: center; margin: 10px;"> 182 </div>	<u>See attached: citations with yellow tab #72915</u>

Monthly Accession Number:														
Library Action	PTO		LC		NAL		NIH		NLM		NIST		Other	
	1st	2nd	1st	2nd	1st	2nd	1st	2nd	1st	2nd	1st	2nd	1st	2nd
Local Attempts	<input checked="" type="checkbox"/>													
Date	<u>11/21</u>		<u>11/24</u>											
Initials	<u>nd</u>		<u>nd</u>											
Results	<u>EL</u>		<u>EL</u>											
Examiner Called														
Page Count														
Money Spent	<u>\$</u>													
Source														
<div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"> Remarks/Comments <small>1st and 2nd denotes time taken to a library</small> Ont - Under NLM means Overnight </div> <div style="width: 60%;"> Ordered From: <u>LC sent *</u> <u>11/25 processed</u> <u>Complete</u> <u>given</u> </div> <div style="width: 20%; text-align: right;"> Date </div> </div>														
Comments:														

SATO Y; OGATA T; ICHINOSAWA S; MURATA Y
 TSUTSUI T, ed; KIDO J, ed
 Yokohama Research Center, Mitsubishi Chemical Corp., 1000, Kamoshida,
 Aoba-ku, Yokohama 227, Japan
 Department of Materials Science and Technology, Graduate School of
 Engineering Sciences, Kyushu University, Kasuga, Fukuoka 816, Japan
 New Energy and Industrial Technology Development Organization (NEDO).
 International Joint Research Programme. "Organic Electroluminescence"
 Research Group, Japan.
 International Conference on Electroluminescence of Molecular Materials
 and Related Phenomena (Fukuoka JPN) 1997-05-21
 Journal: Synthetic metals, 1997, 91 (1-3) 103-107
 Language: English

Copyright (c) 1998 INIST-CNRS. All rights reserved.

Characteristics of organic electroluminescent devices with new
 dopants

TSUTSUI T, ed; KIDO J, ed
 We conducted an investigation of electroluminescent (EL) characteristics
 of the organic EL devices with new dopants 5,12-diphenyl-tetracene (DPT)
 and benzothioxanthene (BTX) derivatives. The organic EL cell doped
 with DPT showed a green emission with high color purity and also good
 operational stability. Concentration quenching was found out to be more
 severe...

... both in the electron-transporting layer and in the hole-transporting
 layer. We demonstrated a white emission by the combination of an
 orange-emitting hole transport layer and a blue-emitting layer.

8/3, K/14 (Item 2 from file: 144)
 DIALOG(R) File 144:Pascal
 (c) 2003 INIST/CNRS. All rts. reserv.

12015886 PASCAL No.: 95-0207653
 Multilayer white light-emitting organic electroluminescent device
 KIDO J; KIMURA M; NAGAI K
 Yamagata univ., dep. materials sci. eng., Yamagata 992, Japan
 Journal: Science : (Washington, DC), 1995, 267 (5202) 1332-1334
 Language: English

0036-8075
 Multilayer white light-emitting organic electroluminescent device
 KIDO J; KIMURA M; NAGAI K
 Organic electroluminescent devices are light-emitting diodes in which
 the active materials consist entirely of organic materials. Here, the
 fabrication of a white light-emitting organic electroluminescent
 device made from vacuum-deposited organic thin films is reported. In this
 device, three emitter layers with different carrier transport properties,
 each emitting blue, green, or red light, are used to generate white
 light. Bright white light, over 2000 candelas per square meter, nearly
 as bright as a fluorescent lamp, was...

...space shuttles. Other uses are a backlight for liquid crystal display as
 well as full color displays, achieved by combining the emitters with
 micropatterned color filters
 English Descriptors: Electroluminescent device; Thin film; Organic material
 ; Display; Liquid crystals; Flat screen; White light; Color display;
 Luminance



AMERICAN
ASSOCIATION FOR THE
ADVANCEMENT OF
SCIENCE

SCIENCE

3 MARCH 1995
VOL. 267 • PAGES 1237-1392

\$7.00

SBXNCCNG ***** FIRM 47907
00000043970300AS 01/05/96 N 0995 44
PURDUE UNIV LIB
P3F KARDEX 9AAP8924
1835 STEWART CENTER
W LAFAYETTE IN 47907-1535

Remaker-Levy



COVER

Four Hubble Space Telescope (HST) images of Jupiter showing (left to right) the plume visible 5 minutes after the impact of fragment G of comet Shoemaker-Levy 9 on 18 July 1994 and the development of the impact site after 1.5 hours, 3 days, and 5 days. The impact sites of

fragments L and S appear in the third and fourth images. See Articles beginning on page 1277. Images: R. Evans, J. Trauger, H. Hammel, and the HST Comet Science Team and NASA



HST Far-Ultraviolet Imaging of Jupiter During the Impacts of Comet Shoemaker-Levy 9

J. T. Clarke, R. Prangé, G. E. Ballester, J. Trauger, R. Evans, D. Rego, K. Stapelfeldt, W. Ip, J.-C. Gérard, H. Hammel, M. Ballav, L. B. Jaffel *et al.*

IST Spectroscopic Observations of Jupiter After the Collision of Comet Shoemaker-Levy 9

K. S. Noll, M. A. McGrath, L. M. Trafton, S. K. Atreya, J. J. Caldwell, H. A. Weaver, R. V. Yelle, C. Barner, S. Edgington

Response of the Io Plasma Torus to Comet Shoemaker-Levy 9

M. A. McGrath, D. T. Hall, P. L. Matheson, H. A. Weaver, J. T. Trauger, T. E. Smith, N. Thomas, R. Gladstone, N. M. Schneider *et al.*

Ultraviolet Signature of Comet Shoemaker-Levy 9 in the Jovian Magnetosphere

R. Prangé, I. M. Engle, J. T. Clarke, M. Dunlop, G. E. Ballester, W. H. Ip, S. Maurice, J. Trauger

Fragment R Collision: W. M. Keck Telescope Observations of SL9

R. Grahan, I. de Pater, J. G. Jernigan, M. C. Liu, M. E. Brown

REPORTS

Climate Warming and the Decline of Plankton in the California Current

R. Roemmich and J. McGowan

Reaction of ClONO₂ with Micrometer Sulfuric Acid Aerosol

R. Hanson and E. R. Lovejoy

Mid Deformation of the South Flank of Kilauea Volcano, Hawaii

Owen, P. Segall, J. Freymueller, A. Miklius, R. M. Finger, T. Arnadóttir, M. Sako, R. Bürgmann

Fluoride White Light-Emitting Diode Electroluminescent Device

Kido, M. Kimura, K. Nagai

A Structure Model and Growth Mechanism for Multishell Carbon Nanotubes

S. Amelinckx, D. Bernaerts, X. B. Zhang, G. Van Tendeloo, J. Van Landuyt

Synthesis and Characterization of Anisometric Cobalt Nanoclusters

C. P. Gibson and K. J. Putzer

Isotopic Tracking of Change in Diet and Habitat Use in African Elephants

P. L. Koch, J. Heisteringer, C. Moss, R. W. Carlson, M. L. Fogel, A. K. Behrensmeyer

Structural Features That Stabilize Halophilic Malate Dehydrogenase from an Archaeobacterium

O. Dym, M. Mevarech, J. L. Sussman

Contribution of STAT SH2 Groups to Specific Interferon Signaling by the Jak-STAT Pathway

M. H. Heim, I. M. Kerr, G. R. Stark, J. E. Darnell Jr.

Choice of STATs and Other Substrates Specified by Modular Tyrosine-Based Motifs in Cytokine Receptors

N. Stahl, T. J. Farruggella, T. G. Boulton, Z. Zhong, J. E. Darnell Jr., G. D. Yancopoulos

A p53-Dependent Mouse Spindle Checkpoint

S. M. Cross, C. A. Sanchez, C. A. Morgan, M. K. Schimke, S. Ramel, R. L. Idzerda, W. H. Raskind, B. J. Reid

Impact of CLOD Pathogen on Pacific Coral Reefs

M. M. Littler and D. S. Littler

The Neuron-Restrictive Silencer Factor (NRSF): A Coordinate Repressor of Multiple Neuron-Specific Genes

C. J. Schoenheit and D. J. Anderson

1356

Coral reef pathogen



AAAS Board of Directors

Eric J. Ayala
President
Simon
Calwell
Vice President
Walter
Vice President
Walter

Anna C. Roaswell
Alan Schlosheim
Juan E. Taylor
Chang-Lin Tien
Nancy S. Wessler

William T. Golden
Treasurer
Richard S. Nicholson
Executive Officer

SCIENCE (ISSN 0036-8073) is published weekly on Friday, except the last week in December, by the American Association for the Advancement of Science, 1333 H Street, NW, Washington, DC 20005. Second-class postage (publication No. 484-420) paid at Washington, DC, and additional mailing offices. Copyright © 1995 by the American Association for the Advancement of Science. The title SCIENCE is a registered trademark of the AAAS. Domestic institutional subscription (\$1 issues): \$97 (\$50 allocated to support). Domestic individual membership and subscription (\$1 issues): \$228. Foreign postage extra. Mexico, Caribbean (surface mail) \$53; other countries (air mail) \$53. First-class, airmail, student and amateur rates on request. Canadian rates with GST available upon request. GST #R1234 56789. Printed in the U.S.A.

Change of address: allow 6 weeks, giving old and new addresses and 11-digit account number. Postmaster: Send change of address to Science, P.O. Box 2008, Marlow, OH 43055-2008. Single copy \$7.00 per issue prepaid including surface postage; bulk rates on request. Authorization to photocopy material for internal or personal use under circumstances not falling within the fair use provisions of the Copyright Act is granted by AAAS to libraries and other users registered with the Copyright Clearance Center (CCC) Transactional Reporting Service, provided that the base fee of \$1 per copy plus \$0.10 per page is paid directly to CCC, 27 Congress St., Salem, MA 01970. The identification code for Science is 0036-8073/95 \$1 + .10. Science is indexed in the Research Guide to Periodical Literature and in several specialized indexes.

1243

- Software Version 3.2 (University of Bern, Bern, Switzerland, 1990); G. Beutler, I. Baurisima, W. Gurner, M. Rothacher, T. Schildknecht, in *Lecture Notes in Earth Sciences*, E. Grollen and R. Strauss, Eds. (Springer-Verlag, New York, 1988), pp. 383-380.
18. Goddard Space Flight Center VLEI model GLB 753, C. Ma, J. Ryan, D. S. Oprete, NASA Technical Memorandum 104552.
 19. We were able to resolve nearly all of the integer cycle ambiguities in 1992 and a significant number in 1990. Ambiguity resolution was not uniformly successful on baselines longer than 50 km or for which there was less than 6 hours of data.
 20. G. Beutler, P. Morgan, R. E. Nelson, *GPS World* (February, 1993), p. 40. The 1993 data were reduced with GPS software. S. M. Lichten and J. S. Borden, *J. Geophys. Res.* 92, 12751 (1987); S. M. Lichten, *Manuscripta Geodetica* 15, 159 (1990). We included data from seven global tracking stations to tie the Hawaii network to the IGS reference frame.
 21. This procedure is conservative in that it treats any actual deformation occurring during the annual surveys as measurement error.
 22. Only two stations are inconsistent with the constant rate model. One of these, HULU, is located within the

- upper east rift zone and may have been affected by local deformation. We suspect a problem in the 1992 data at the second site, KULN.
23. W. Thatcher, *U.S. Geol. Surv. Prof. Pap.* 1518, 189 (1990).
 24. Y. Okada, *Bull. Seismol. Soc. Am.* 75, 1135 (1985).
 25. W. A. Duffield, *U.S. Geol. Surv. Prof. Pap.* 856, 1 (1975).
 26. H. T. Stearns and W. O. Clark, *U.S. Geol. Surv. Water-Supply Paper* 618, 194 (1930); H. T. Stearns and G. A. MacDonald, *Hawaii Div. Hydrograph. Bull.* 9, 383 (1948); J. G. Moore and H. L. Krivoy, *J. Geophys. Res.* 69, 2033 (1964).
 27. P. W. Lipman, W. R. Normark, J. G. Moore, J. B. Wilson, C. E. Gutierrez, *J. Geophys. Res.* 93, 4279 (1988).
 28. J. G. Moore et al., *ibid.* 94, 17465 (1989); J. G. Moore and G. W. Moore, *Science* 228, 1312 (1984).
 29. W. W. Chadwick et al., *U.S. Geol. Surv. Misc. Field Stud. Map MF-2237* (1993); J. R. Smith, Sheet 5, *Hawaii Seafloor Atlas* (Hawaii Institute of Geophysics and Planetary, Honolulu, HI, 1994).
 30. J. R. Smith, *Eos* 73, 507 (1992); W. W. Chadwick, J. G. Moore, C. G. Fox, D. M. Christie, *ibid.*, p. 507.
 31. D. A. Swanson, *Science* 175, 169 (1972); D. Zurich,

- sin, R. Y. Koyanagi, T. T. English, *J. Volcanol. Geotherm. Res.* 21, 177 (1984).
32. J. H. Dieterich, *J. Geophys. Res.* 93, 4258 (1988).
 33. M. P. Ryan, *ibid.*, p. 4213.
 34. A. Borgia, *ibid.* 99, 17791 (1994); D. A. Cague and R. P. Denlinger, in preparation.
 35. K. Nakamura, *Bull. Volcanol. Soc. Jpn.* 25, 255 (1980).
 36. D. C. Cox, *Source of the Tsunami Associated with the Kilauea (Hawaii) Earthquake of November 1975* (Hawaii Institute of Geophysics, Honolulu, HI, 1980).
 37. The August 1990 GPS data were collected under the supervision of J. Dvorak. Thanks to V. Smith, L. Liu, E. Yu, and A. Okamura for help in collecting the field data. P. Okubo provided the earthquake summary data shown in Fig. 1. J. Smith provided the digital topographic and bathymetric data in Fig. 1. Thanks to T. Duennabier for help with graphics and to Y. Book for providing cleaned GPS tracking data for August 1990. Thanks to P. Delaney and D. Swanson for comments on an early draft of the manuscript.

9 September 1994; accepted 1 December 1994

Multilayer White Light-Emitting Organic Electroluminescent Device

Junji Kido, Masato Kimura, Katsutoshi Nagai

Organic electroluminescent devices are light-emitting diodes in which the active materials consist entirely of organic materials. Here, the fabrication of a white light-emitting organic electroluminescent device made from vacuum-deposited organic thin films is reported. In this device, three emitter layers with different carrier transport properties, each emitting blue, green, or red light, are used to generate white light. Bright white light, over 2000 candelas per square meter, nearly as bright as a fluorescent lamp, was successfully obtained at low drive voltages such as 15 to 16 volts. The applications of such a device include paper-thin light sources, which are particularly useful for places that require lightweight illumination devices, such as in aircraft and space shuttles. Other uses are a backlight for liquid crystal display as well as full color displays, achieved by combining the emitters with micropatterned color filters.

Electroluminescent (EL) devices based on organic thin layers are one of the most promising next-generation flat panel display systems. These devices can be made into large-area, extremely thin full color displays that can be operated by batteries. The structure of the devices is simple, having organic thin layers sandwiched between two electrodes. Because organic layers can be formed by vacuum evaporation or solution casting, the fabrication cost could be less than that of the liquid crystal displays, which are today the most widely used flat panel displays.

In organic EL devices, the generation of light is the consequence of the recombination of holes and electrons injected from the electrodes. Such carrier recombination in the organic emitter layer excites the emitting centers. In a chemical sense, the reaction of radical cations (holes) and radical anions (electrons) provides excited

molecules that emit light as one of the decay processes. A variety of materials have been investigated as active materials¹⁻⁹, and a number of device structures¹⁰⁻²² have been proposed because it is important to find an appropriate device structure to maximize the carrier recombination efficiency.

The use of multilayer structures was first demonstrated by Tang and VanSlyke¹. They used a hole-transport layer for hole injection from the electrode into the electron-transporting emitter layer, which significantly improved the EL efficiency to 1.5 lm/W. Bright electroluminescence of over 1000 cd/m², which is high enough for practical applications, with a voltage below 10 V was achieved first. Their device consisted of two active layers with an organic hole-transport layer and an electron-transporting luminescent metal complex layer. The hole-transport layer plays an important role not only in transporting holes but also in blocking electrons, thus preventing electrons from moving into the opposite elec-

trode without recombining with holes. The recombination, therefore, mainly takes place in the emitter layer. Since this first device, various types of EL devices with a multilayer structure have been reported. For instance, a luminescent hole-transporting material can also be an emitter layer when combined with an appropriate electron-transport layer^{4, 9, 13}.

In the above examples, various emitting colors have been obtained, including the three primary colors of blue, green, and red. However, there are few white light-emitting devices owing to the lack of the organic fluorescent dyes with white fluorescence. We have therefore focused on developing white light-emitting EL devices and have recently developed one made from a polymer emitter layer doped with three kinds of fluorescence dyes, each emitting blue, green, or red to produce white light¹⁷.

In this study, we developed a device structure with three emitter layers, each emitting in the different region of the visible spectrum to generate white light. In general, organic EL devices are composed of two organic layers, each transporting either holes or electrons. In such a device, one of the two layers functions as an emitter layer and the other as a carrier transport layer. Therefore, the emission color is determined by the fluorescence properties of the emitter material, and the light is of the particular color of the emitting material.

One way to add another emission color to such a device is to dope the emitter layer with a fluorescent dye of a different color. For example, it was demonstrated that, in a device with an electron-transporting green-emitting aluminum chelate emitter and a hole-transport layer, when the chelate layer is partly doped with a red-emitting fluorescent dye, the resulting light becomes a mixture of the lights from the two emitter materials, thus producing yellow light¹².

Department of Materials Science and Engineering,
Yamagata University, Yonezawa, Yamagata 992, Japan.

REPORTS

In this case, the dopant is excited by the energy transfer from the host aluminum chelate or the direct recombination at the dopant site resulting from carrier trapping, or both.

Another way to alter color is to control the carrier recombination zone so that the recombination takes place in two different layers. In this case, the lights from the two layers are combined to produce the mixed color. We have recently reported the spatial control of the recombination zone by the insertion of a hole-blocking layer between an electron-transport layer and a hole-transport layer (16). We showed that 1,2,4-triazole derivative is suitable for the hole-blocking layer and that by inserting a thin layer of triazole, carrier recombination can occur both in an electron-transport layer and a hole-transport layer, thus generating light in both layers.

With these two methods, it is expected that in a device with a hole-transport layer, an electron-transport layer, and a doped layer, all three can be emitter layers when an appropriate thickness of a hole-blocking layer is inserted between the hole-transport layer and the electron-transport layer. Thus, using three emitter layers, generating blue, green, and red light, respectively, we expect white light as a mixture of these three primary colors.

Figure 1 shows the materials used in this study. A hole-transporting triphenyl-diamine derivative (TPD) has emission peaks at around 410 to 420 nm, the blue region of the visible spectrum. A hole-blocking 1,2,4-triazole derivative (p-ErTAZ) has an emission at around 380 nm that transports electrons and effectively

blocks holes. An electron-transporting aluminum complex (Alq) has an emission at 520 nm (green), and Nile Red, which has an emission peak at 600 nm (red), is used as a dopant. Indium-tin oxide (ITO) and a magnesium-silver alloy were used as a hole-injecting contact and an electron-injecting contact, respectively.

In the two-layer systems composed of an electron-transport layer and a hole-transport layer, only one of the two layers works as the emitter layer. Figure 2, spectra A and B, illustrate EL spectra of two of such devices, ITO/TPD (500 Å)/Alq (500 Å)/Mg:Ag and ITO/TPD (500 Å)/p-ErTAZ (500 Å)/Mg:Ag. From the device with TPD/Alq, green light originating from Alq is observed, indicating that excitons are generated in the Alq layer and the TPD functions only as a hole-transport layer. In contrast, in the device with TPD/p-ErTAZ, purplish blue light from the TPD layer is observed, indicating that p-ErTAZ has an electron-transporting tendency and blocks holes. Thus, carrier recombination takes place in the TPD layer and consequently excites TPD. Because the excitation energy level of p-ErTAZ (emission wavelength, ~390 nm) is higher than that of TPD, the excited energy is not transferred from TPD to p-ErTAZ at the interface. These results demonstrate that both Alq and TPD can function as an emitter when combined with an appropriate carrier transport layer.

In devices having three layers, a thin layer of hole-blocking p-ErTAZ is inserted between TPD and Alq. A device with 50 Å of p-ErTAZ yields emission mostly from TPD (Fig. 2, spectrum C), implying that the recombination zone is mostly in the TPD

layer, whereas a device with a thinner (30 Å) p-ErTAZ layer (Fig. 2, spectrum D) exhibits emission from both the TPD and

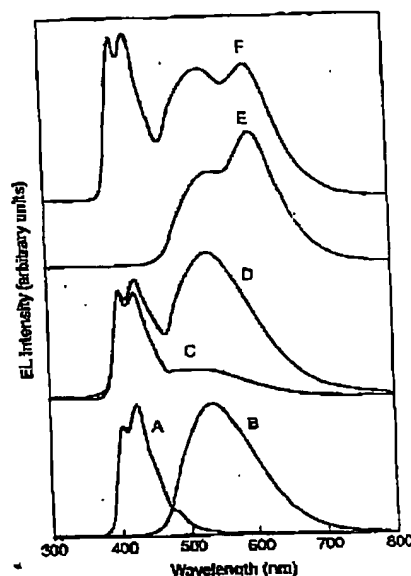


Fig. 2. Electroluminescence spectra for (spectrum A) ITO/TPD (500 Å)/p-ErTAZ (500 Å)/Mg:Ag, (spectrum B) ITO/TPD (500 Å)/Alq (500 Å)/Mg:Ag, (spectrum C) ITO/TPD (400 Å)/p-ErTAZ (50 Å)/Alq (500 Å)/Mg:Ag, (spectrum D) ITO/TPD (400 Å)/p-ErTAZ (30 Å)/Alq (500 Å)/Mg:Ag, (spectrum E) ITO/TPD (400 Å)/Alq (50 Å)/Nile Red-doped (1 mol %) Alq (50 Å)/Alq (400 Å)/Mg:Ag, and (spectrum F) ITO/TPD (400 Å)/p-ErTAZ (30 Å)/Alq (50 Å)/Nile Red-doped (1 mol %) Alq (50 Å)/Alq (400 Å)/Mg:Ag cells. These EL spectra were normalized and offset for clarity. All the EL spectra were taken at a current density of 40 mA/cm² with an optical multichannel analyzer (Hamamatsu PMA 10).

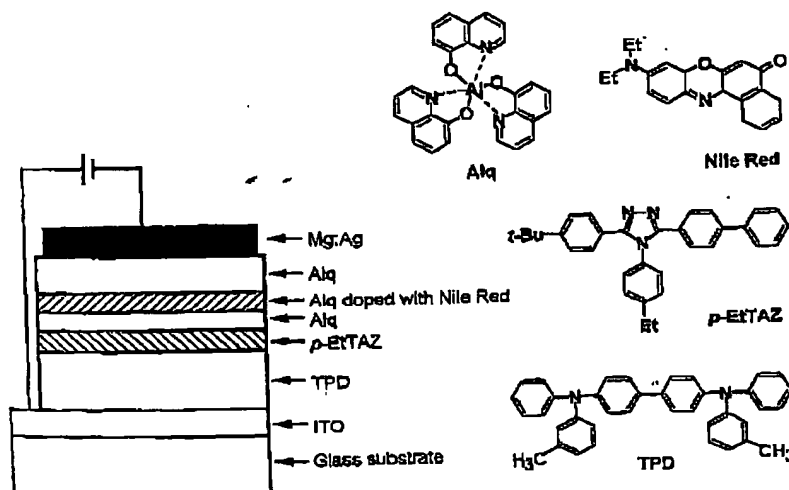


Fig. 1. Configuration of the EL device and molecular structures of materials used. The organic layers were vacuum-deposited on a hole-injecting indium-tin oxide (ITO)-coated glass substrate with a sheet resistance of 15 ohm per square at 10⁻⁶ torr. The electron-injecting contact was made of an alloy of magnesium and silver (10:1), which was vacuum-deposited from separate sources.

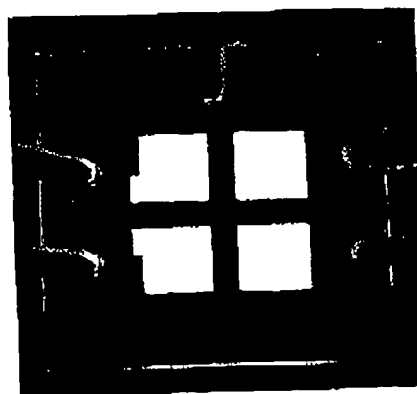


Fig. 3. A photograph of a working white light-emitting EL device. The device is an ITO/TPD (400 Å)/p-ErTAZ (30 Å)/Alq (50 Å)/Nile Red-doped (1 mol %) Alq (50 Å)/Alq (400 Å)/Mg:Ag cell. The emitting area is 0.5 cm by 0.5 cm.

the Alq layers. These data indicate that holes can penetrate to some extent when the thickness of the p-ErTAZ layer is 30 Å, and the recombination zone locates both in the TPD and Alq layers. Thus, the recombination zone can be spatially controlled by adjusting the thickness of the p-ErTAZ layer, and emission from both the hole-transport layer (purplish blue) and the electron-transport layer (green) can be obtained with this device structure. These results are similar to the results obtained with another kind of a triazole derivative (16).

Because the device with a p-ErTAZ layer 30 Å thick provides bluish green light, the addition of red light should make the output white. To do so, we used the modulation doping technique developed by Tang et al. (12), in which the Alq layer is doped with Nile Red. Because the emissions from both Alq and Nile Red are necessary, a doped zone 50 Å thick is formed 50 Å away from the interface between the TPD and Alq layers. Thus, the excitons generated in the Alq layer near the interface between TPD and Alq diffuse to the doped layer, exciting the dopants. A TPD/Alq device designed in this manner displays emission from both Alq at 520 nm (green) and Nile Red at 600 nm (red), providing yellow light (Fig. 2, spectrum E). In this case, the dopant molecules are excited by the energy transfer from the host Alq or by direct excitation by carrier recombination at the dopant sites, or both.

Combining the spatial control of the recombination zone and the modulation doping technique, we attempted the generation of white light. The device structure is ITO/TPD (400 Å)/p-ErTAZ (30 Å)/Alq (50 Å)/Nile Red-doped (1 mol %) Alq (50 Å)/Alq (400 Å)/Mg:Ag (Fig. 1). Upon the application of dc voltage at ITO positive, white light is observed from the device

through the glass substrate (Fig. 3). The EL spectrum (Fig. 2, spectrum F) covers a wide range of the visible region, and three peaks at 410, 520, and 600 nm are seen, corresponding to emission from TPD, Alq, and Nile Red, respectively. In Fig. 4, luminance-voltage and current-voltage characteristics are given. Luminescence starts at a low voltage, such as 6 V, and a maximum luminance of 2200 cd/m² is achieved at 16 V. In comparison, the luminance of a cathode ray tube monitor is about 100 cd/m². A reasonably high luminous efficiency of 0.5 lm/W is obtained at 12 V. At this drive voltage, the luminance is about 300 cd/m². Optimization of the device structure and the use of more suitable materials should provide higher efficiencies, as well as luminance that may exceed 8000 cd/m², the luminance of common fluorescent lamps.

We have not measured the lifetime of the device yet; but in general, the stability of organic EL devices have been improving these days. Ten thousand hours of continuous operation has been reported (22). Because organic materials have flexibility in material design, an unlimited number of organic materials can be synthesized for the EL application, which is one of their major advantages over inorganic materials. Thus, the possibility of developing organic EL devices having practical durability is quite high.

REFERENCES AND NOTES

1. C. W. Tang and S. A. VanSlyke, *Appl. Phys. Lett.* 51, 913 (1987).
2. C. Adachi, T. Tsutsui, S. Saito, *ibid.* 56, 799 (1990).
3. J. H. Burroughes et al., *Nature* 347, 539 (1990).
4. J. Kido, K. Nagai, Y. Okamoto, T. Skotheim, *Chem. Lett.* 1991, 1267 (1991).
5. ———, *Appl. Phys. Lett.* 59, 2760 (1991).
6. Y. Hamada, C. Adachi, T. Tsutsui, S. Saito, *Jpn. J. Appl. Phys.* 31, 1812 (1992).
7. N. C. Greenham et al., *Nature* 365, 628 (1993).
8. E. Amini, T. Tsutsui, S. Saito, *Jpn. J. Appl. Phys.* 33, 1061 (1994).
9. J. Kido, K. Hongawa, K. Okuyama, K. Nagai, *Appl. Phys. Lett.* 63, 2027 (1993).
10. C. Adachi, S. Tokito, T. Tsutsui, S. Saito, *Jpn. J. Appl. Phys.* 27, L268 (1988).
11. ———, *ibid.*, p. L713.
12. C. W. Tang, S. A. VanSlyke, C. H. Chan, *J. Appl. Phys.* 68, 3810 (1989).
13. C. Adachi, T. Tsutsui, S. Saito, *Appl. Phys. Lett.* 65, 1489 (1993).
14. J. Kido, M. Kohda, K. Okuyama, K. Nagai, *ibid.* 61, 761 (1992).
15. J. Kido, M. Kohda, K. Hongawa, K. Okuyama, K. Nagai, *Mol. Cryst. Liq. Cryst.* 227, 277 (1993).
16. J. Kido, C. Ohtaki, K. Hongawa, K. Okuyama, K. Nagai, *Jpn. J. Appl. Phys.* 32, L917 (1993).
17. J. Kido, K. Hongawa, K. Okuyama, K. Nagai, *Appl. Phys. Lett.* 64, 818 (1994).
18. M. Era, S. Morimoto, T. Tsutsui, S. Saito, *ibid.* 65, 678 (1994).
19. V. L. Colvin, M. C. Schlamp, A. P. Alivisatos, *Nature* 370, 354 (1994).
20. C. Morishima, M. Yoshida, A. Fujii, Y. Ohmori, K. Yoshino, *Jpn. J. Appl. Phys.* 33, L1228 (1994).
21. J. Kido, H. Hayase, K. Hongawa, K. Nagai, K. Okuyama, *Appl. Phys. Lett.* 65, 2124 (1994).
22. Y. Shirota et al., *ibid.*, p. 807.

21 October 1994; accepted 23 December 1994

A Structure Model and Growth Mechanism for Multishell Carbon Nanotubes

S. Amelinckx,* D. Bernaerts, X. B. Zhang, G. Van Tendeloo, J. Van Landuyt

A model that postulates a mixture of scroll-shaped and concentric, cylindrical graphene sheets is proposed to explain the microstructure of graphite multishell nanotubes grown by arc discharge. The model is consistent with the observed occurrence of a relatively small number of different chiral angles within the same tubule. The model explains clustering in a natural way and is consistent with the observation of asymmetric (0002) lattice fringe patterns and with the occurrence of singular fringe spacings larger than $c/2$ (c is the c parameter of graphite) in such patterns. Anisotropic thermal contraction accounts for the 2 to 3 percent increase in the c parameter of nanotubes, compared with bulk graphite, but is too small to explain the singular fringe spacings. The model also explains the formation of multishell closure domes. Nucleation is attributed to the initial formation of a fullerene "dome."

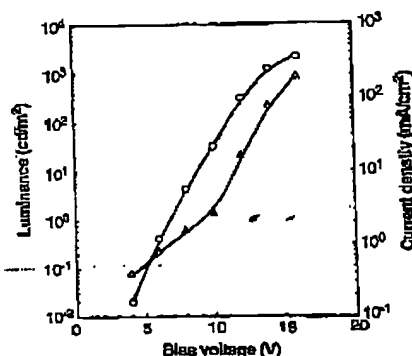


Fig. 4. Luminance-voltage (circles) and current-voltage (triangles) characteristics of a white light-emitting EL device. Luminance was measured at room temperature with a Minolta LS-100 luminance meter.

Iijima (1) found that nanometer-thin, micrometer-long tubes consisting of concentric, cylindrical graphene sheets are formed as a by-product of the arc-discharge synthesis of fullerenes (2). These tubes have a chiral

character (1) that can determine their electronic properties (3). Electron diffraction studies showed that many multishell tubules contain achiral as well as chiral tubes (4, 5). A multilayer tubule may exhibit several chiral angles, their number being very often 1/2 to 1/5 the number of sheets, suggesting that the sheets occur in clusters with the same chirality. It was proposed (4, 5) that the chirality is a means of accommodating

Electron Microscopy for Materials Research, University of Antwerp (RUCA), Groenenborgerlaan 171, B-2020 Antwerp, Belgium.

*To whom correspondence should be addressed.

SCIENCE • VOL. 267 • 3 MARCH 1995

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.